




Portable Site Light

PS-200


Deployable portable lighting in one
bespoke robust package.

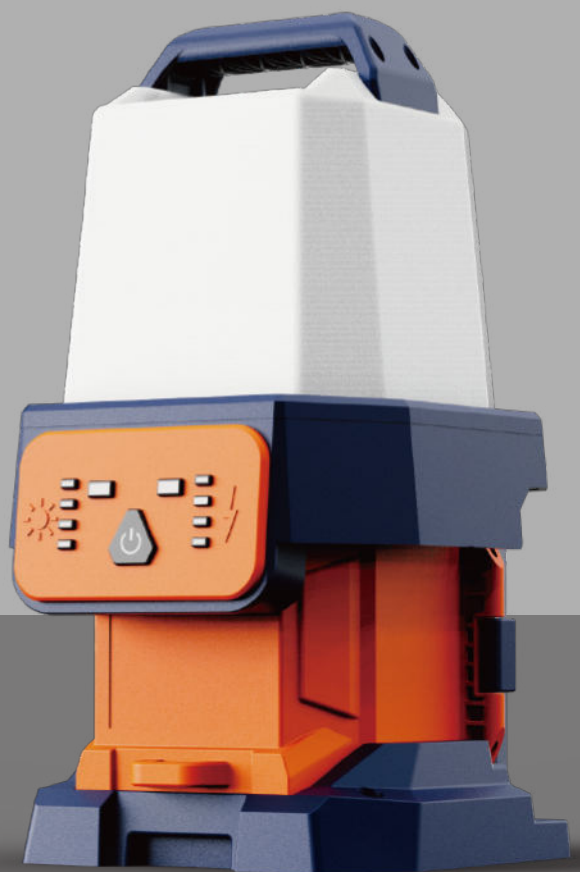

**UP TO
6000LM**

Turbo	6,000LM
Standard	3,500LM
Balanced	2,200LM
Eco	600LM

Application



Ultra-long Endurance

Standard Mode Up To **8+** Hours
(D24-100)

Various working modes.



IP66



IK10



Dimmable



360° Lighting



Light-weight



Long Working Hour





Placed on any surface or hung up to provide continuous lighting for complex environments.

2KG

Ultra-lightweight and capable of carrying multiple at once.



360-degree lighting that can illuminate all details even in small spaces.


360° lighting

Specifications

PS-200

Weight	2.0kg (Fitting only)
Power Supply	Battery
Lumens	0 - 6,000Lm
Run Times	>8 hours (Standard mode, D24-100)
IP Grade	IP66
Battery System	D24 Series
Working Temp.	-10℃ ~50℃
Working Humidity	1~98%

Size (mm)

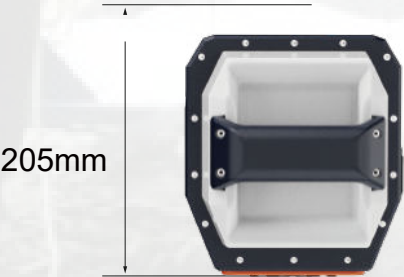

Package

Model	Size of Carton	Gross Weight of Carton	PCS/Carton
PS-200 D24-54/100	230x250x400mm	3.5KG±5%	PS200x1, D24-54/100x1

